JUNE 2020

Oxford Carriage Door Ltd.

DOOR CONSTRUCTION DETAILS

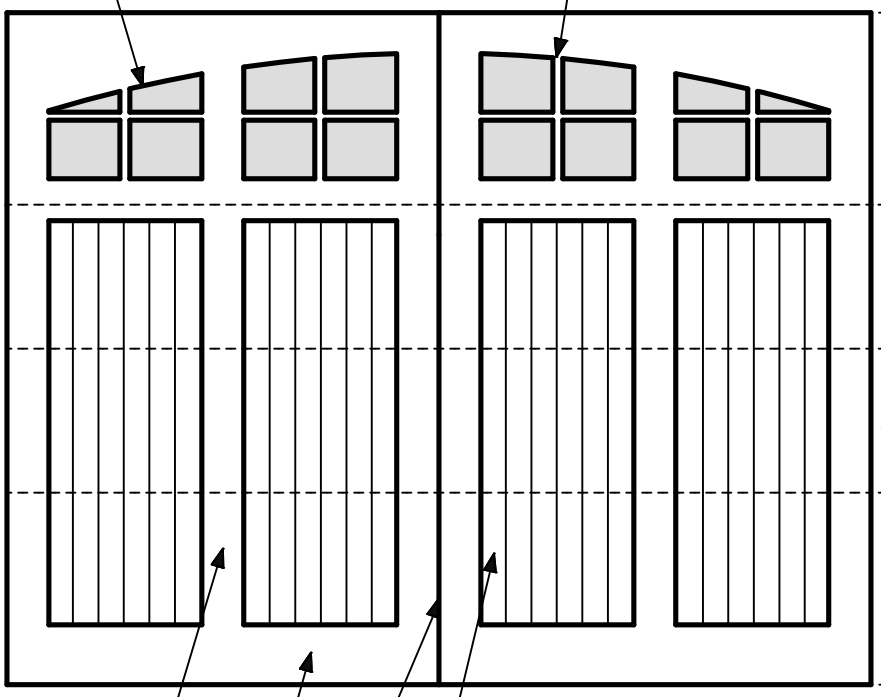

INLAY MATERIALS

EXPOSED WOODGRAIN STEEL PANEL
7/16" X 3" CLEAR CEDAR T&G V-MATCH
5/8" X 5" CLEAR CEDAR T&G V-MATCH
CLEAR CEDAR FLAT PANEL OR RAISED PANEL
EXTIRA FLAT PANEL OR RAISED PANEL
OR AS SPECIFIED BY YOU

V-GROOVE

OVERLAY BOARDS

5/8" X 5 1/4" CLEAR CEDAR
(NOTE: BOTTOM RAILS ARE 5/8" X 7 1/4")
EXTIRA
OR AS SPECIFIED BY YOU.

INTERMEDIATE VERTICAL STILES

5 1/4" FOR WATERLOO, LINWOOD, AND OXFORD
2 1/2" FOR SHAKESPEARE
1 1/2" FOR BENTLEY
OR AS SPECIFIED BY YOU

CROSS–SECTION

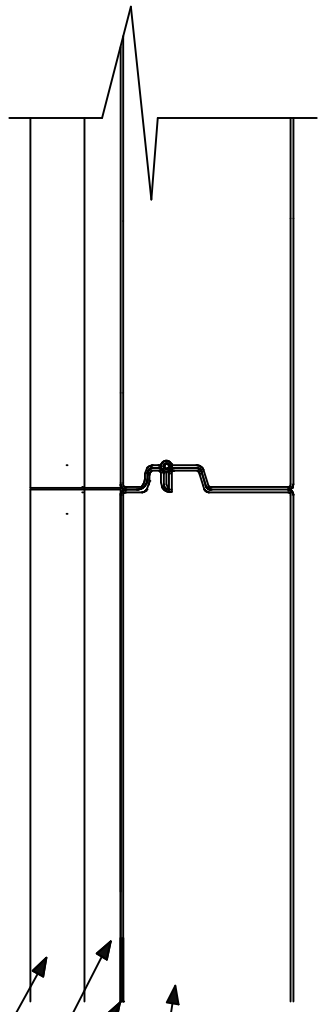

OVERLAY

INLAY

FLEXIBLE HEAVYDUTY
CONSTRUCTION ADHESIVE
PLUS MECHANICAL FASTENING

PREMIUM QUALITY R18
FOAMED-IN-PLACE POLYURETHANE
INSULATED SECTION WITH DUAL SECTION
SEALS AND THERMAL BREAK